


## MAGNETIC LED ARROW SIGN

Code: AB-4685

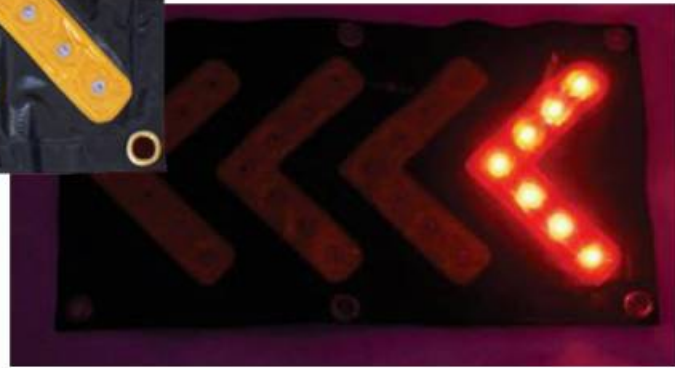

### FEATURES

- The main function of this consists in indicate, sign dangers and guide pedestrians and motorists clearly and precisely.
- In highways, is fundamental to maintain the order and prevent accidents, specially at intersections and changes of direction.
- This arrow has the ability to communicate information safely and effectively, even in adverse conditions as rain, fog or darkness.
- Flashing tarpaulin.
- High luminosity red light LEDs.
- Control buttons.
- Water resistant.
- Holes and magnets for fastening.
- It uses 3 "AA" batteries (included).
- ON/OFF switch.
- Vulcanized edges to avoid water filtration.
- Resistant to environment and extreme temperature changes.
- UV protection.
- Flashing is visible to more than 656 ft of distance during night and in adverse climate conditions.



# MAGNETIC LED ARROW SIGN

Code: AB-4685

## TECHNICAL SPECIFICATIONS

Type Sign	<ul style="list-style-type: none"> <li>Tarpaulin with chevron and arrow</li> </ul>
Made of	<ul style="list-style-type: none"> <li>Vinyl tarpaulin</li> </ul>
Reflective Mat.	<ul style="list-style-type: none"> <li>Prismatic</li> </ul>
LED Modules	<ul style="list-style-type: none"> <li>28 &amp; 30</li> </ul>
LED Color	<ul style="list-style-type: none"> <li>Red and Amber</li> </ul>
Watts	<ul style="list-style-type: none"> <li>2.8</li> </ul>
Light Intensity	<ul style="list-style-type: none"> <li>+6,500 mcd per LED</li> </ul>
LED Life Span	<ul style="list-style-type: none"> <li>100,000 hrs (10 years)</li> </ul>
Measurements	<ul style="list-style-type: none"> <li>Length: 32.2 in</li> <li>Width: 17.7 in</li> </ul>
Battery	<ul style="list-style-type: none"> <li>3 "AA" batteries</li> </ul>
Control	<ul style="list-style-type: none"> <li>Manual</li> </ul>
<b>TARPAULIN</b>	
Support	<ul style="list-style-type: none"> <li>100 % acrylic dyed in its paste</li> </ul>
Weight in gr / m2 and oz / ft2	<ul style="list-style-type: none"> <li>300 gr/m2 and 0.983 oz /ft2</li> </ul>
Coating	<ul style="list-style-type: none"> <li>Fluocarbono.*</li> </ul>
Impermeability	<ul style="list-style-type: none"> <li>350 mm.</li> </ul>
Light Fastness	<ul style="list-style-type: none"> <li>7/8.</li> </ul>
Tensile Strength	<ul style="list-style-type: none"> <li>145.</li> </ul>
Breaking Strength (daN) / 5cmts	<ul style="list-style-type: none"> <li>Weft 90.</li> </ul>
Tear Strength (daM) / 5 cmts	<ul style="list-style-type: none"> <li>Weft &gt;2.0.</li> </ul>