

SPEED BUMP 894

Code: RVC-894

FEATURES




- Speed bump to reduce speed, which decrease speed from approx. 1.8 to 4.9 mph.
- Can be installed in any surface immediately.
- Perfect to reinforce STOP signs.
- Ideal to use in pedestrian crossings, intersections and avenues.
- Resistant to UV light, humidity, oil and extreme temperatures.
- The device is assembled through a male-female system.
- Its installation is done with expansion screws.
- It doesn't require maintenance.

MEASUREMENTS

Volumes, dimensions and other measures are nominal and may vary by approximately 2%.

- | | |
|------------------------|---|
| Total | <ul style="list-style-type: none"> • Length: 35.0 in • Width: 11.8 in • Height: 2.1 in |
| Manufactured in | <ul style="list-style-type: none"> • High density polyethylene |
| Color | <ul style="list-style-type: none"> • Black and yellow |
| Approx. weight | <ul style="list-style-type: none"> • 12.963 lbs |

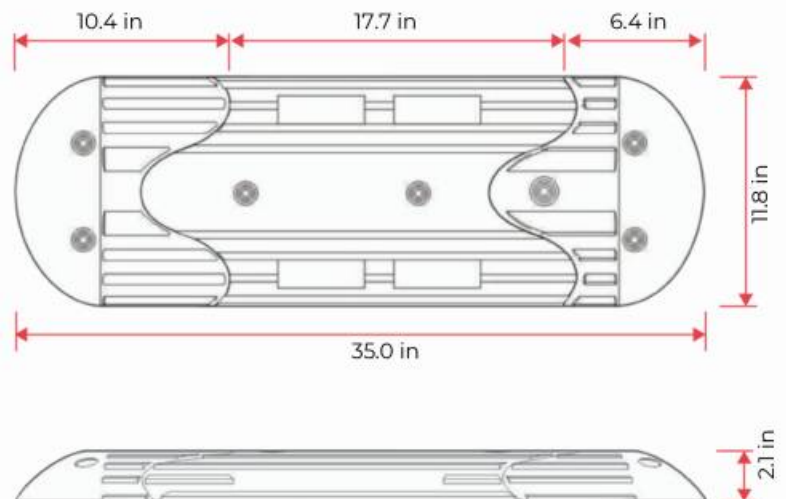

SPEED BUMP 894

Code: RVC-894

TECHNICAL SPECIFICATIONS

Dielectric Constant @1MHz	• 2, 3-2, 4	Tensile Modulus (GPa)	• 0,5 - 1,2
Dissipation Factor to 1Mhz	• $1-10 \times 10^{-4}$	Poisson's Ratio	• 0.46
Dielectric Strength (kV mm)⁻¹	• 22	Tensile Strength (MPa)	• 15 - 40
Volume Resistivity (Ohmcm)	• $10^{15} - 10^1$	Impact Strength Izod	• 20 - 210
Surface Resistivity (Ohm/sq)	• 10^{13}	Specific Heat Capacity (J K⁻¹kg)	• 1900
Water Absorption - in 24 hrs (%)	• <0,01	Coefficient of Thermal Expansion (x10⁶ K⁻¹)	• 100 - 200
Density (g cm⁻³)	• 0,95	Thermal conductivity to 23 C (W m⁻¹ K⁻¹)	• 0,45 - 0,52
Limited Oxygen Index (%)	• 17	Heat Deflection Temperature - 0.45MPa (C)	• 75
Refractive Index	• 1,54	Heat Deflection Temperature - 1.8MPa (C)	• 46
Flammability HB	• HB	Maximum Operating Temperature (C)	• 55 - 120
Coefficient of friction	• 0,29		
Rockwell - Hardness	• D60 - 73 - Shore		