

LANE SEPARATOR B-75 DELINEATOR POST

Code: ITO-B-75



FEATURES

- The use of this is suggested in rows.
- Body resistant to impacts, due its flexibility.
- Heavyweight base in black color for more stability and support to the post.
- Withstand multiple run overs (guaranteed), returning to its original position after run over.
- Manufactured in Poliflexy®, 100% flexible material that doesn't cause damage to vehicles.
- Resistant to environment and extreme temperature changes; with UV protection.
- Line color: orange to be more visible (other colors upon request).
- 3 prismatic reflective rings for greater visibility at night.
- Easy to place and change its place.


WHAT'S A DELINEATOR POST?

Permanent preventive signaling; flexible post with cylindrical body that has great effectiveness due to its height to driver's sight level, with robust base.

Used to indicate a route or delimit specific areas, limiting the passage.

Efficient and affordable device.

Useful in diversions, parking lots, bike lanes, restricted zones, et al.

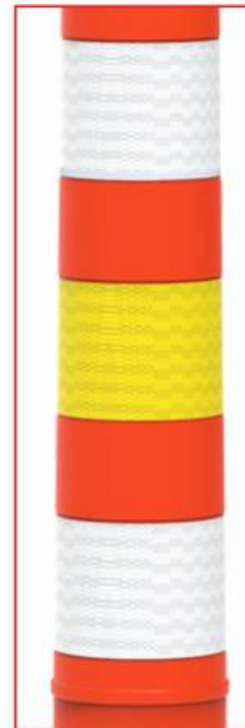

LANE SEPARATOR B-75 DELINEATOR POST

Code: ITO-B-75

MEASUREMENTS


Dimensions and other measures are nominal and may vary by + / - 2%.

- Total**
 - Top ϕ . 3.3
 - Base ϕ 9.4 in
 - Total Height: 29.5 in
- Reflective**
 - 3 rings
- Color of Reflective Tape**
 - White or amber
- Approx. Weight**
 - 4.651 lbs

ANCHORING

1. Mark the 4 boreholes where the posts will be installed, using a drill and a $\frac{1}{2}$ " drill bit for concrete.
2. Drill to a 7" depth, insert the extralarge anchors in every borehole with some epoxy.
3. Mount the post and place $\frac{3}{8}$ " screw/flat washer with a $\frac{9}{16}$ " socket wrench, tighten every screw and is...

DONE!

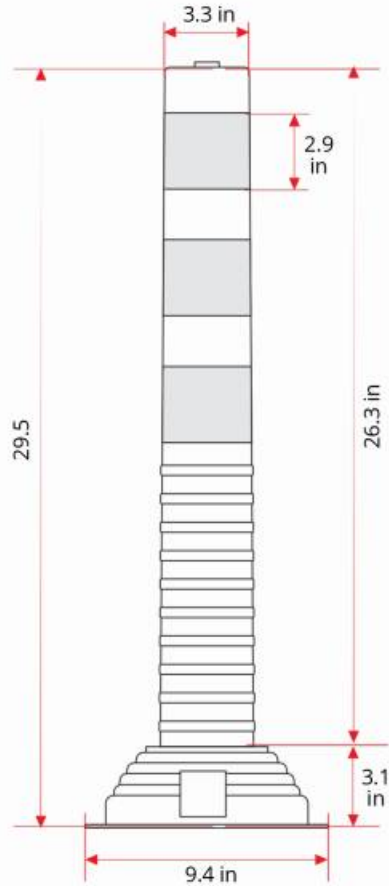

- 21 v ϕ $\frac{3}{8}$ " x 5.9" Hex Head Ultrafix Screw
- $\frac{3}{8}$ " flat washer
- Base of the post
- ϕ 0.7" x 5.5" Extralarge Anchor
- Borehole in concrete

- Anchoring in concrete**
- ϕ 3.8" x 5.9" Hex Head Ultrafix Screw
 - ϕ 0.7" x 5.5" Extralarge Anchor

