

## YELLOW LANE SEPARATOR BARRIER

Code: B-150

### FEATURES



- Special for counter flow lanes and separation of light and heavy transit.
- Resistant to environment, UV-rays and extreme temperature changes, as impacts and rolling.
- Design that allows an easy transport due to its lightweight.
- Smooth surface with round borders and without cutting edges.
- No maintenance needed.
- Integrates a male-female system for an easy and safe placement.
- Clamping bolts for a fixed fastening.
- Special ramp type end to avoid any damage in vehicles, in case of run over.

### MEASUREMENTS



Dimensions and other measures are nominal and may vary by + / - 2%.

#### Total

- Length: 14.9 ft
- Width: 8.5 in
- Height: 4.9 in

#### Manufactured in

- Medium density polyethylene

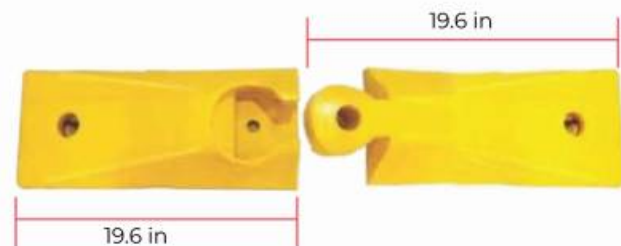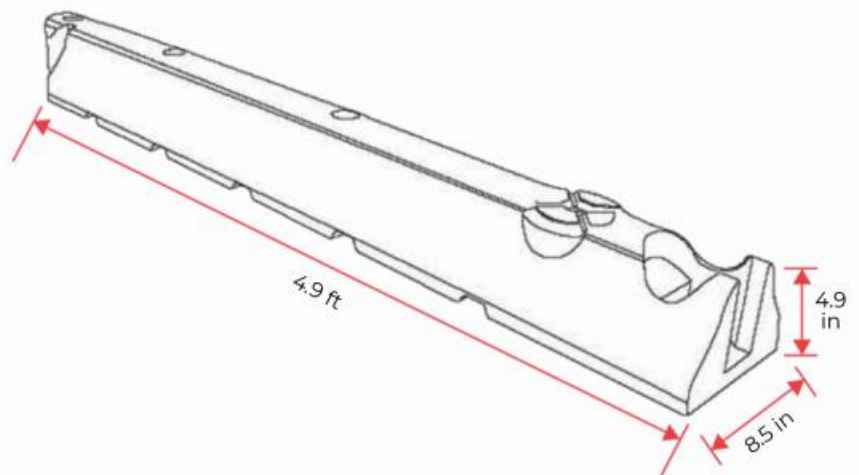

# YELLOW LANE SEPARATOR BARRIER

Code: B-150

## TECHNICAL SPECIFICATIONS

**Tensile Strength at Yield Point  
(ASTM D 638)**

- 17.3 mpa

**Tensile Strength at Breaking  
Point (ASTM D638)**

- 27.2 mpa

**Yield Point Elongation  
(ASTM D 638)**

- 17.4 %

**Elongation at Break  
(ASTM D 638)**

- 1 500 %

**Flexural Modulus  
(ASTM D 638)**

- 610 mpa

**Impact Strength Izod  
(ASTM D 256)**

- 530 j/m

**Tensile Impact Strength  
(ASTM D 1822)**

- 163 kj/m<sup>2</sup>

**ARM Impact 40°C (104°F), 3.2  
mm**

- 23 900 j/m

**Softening Point  
(vicat) (ASTM D 1525)**

- 113°C or 235.4°F

**Heat Deflection Temperature  
(ASTM D 648)**

- 80°C or 176°F