

ROAD ANTI GLARE SCREEN

Code: PA-132

FEATURES


- High resistance to heavy shocks and impacts.
- Easy to handle due its levity and simple assembly.
- Easy to transport thanks to its lightweight body and modular design in different sizes.
- Round borders to provide more security in case of collision, due its parts and materials are harmless to people.
- Very helpful for motorists to decrease the light intensity.
- Color: Yellow.
- Adaptable accessory to our 2001 series barriers.
- The latest in anti glare technology.



MEASUREMENTS

Dimensions and other measures are nominal and may vary by +/- 2%.

- | | |
|------------------------------|---|
| Total | <ul style="list-style-type: none"> • Height: 4.3 ft • Upper Width: 8.6 in • Lower Width: 11.8 in |
| Color | <ul style="list-style-type: none"> • Yellow |
| Reflective Tape Color | <ul style="list-style-type: none"> • White or amber |

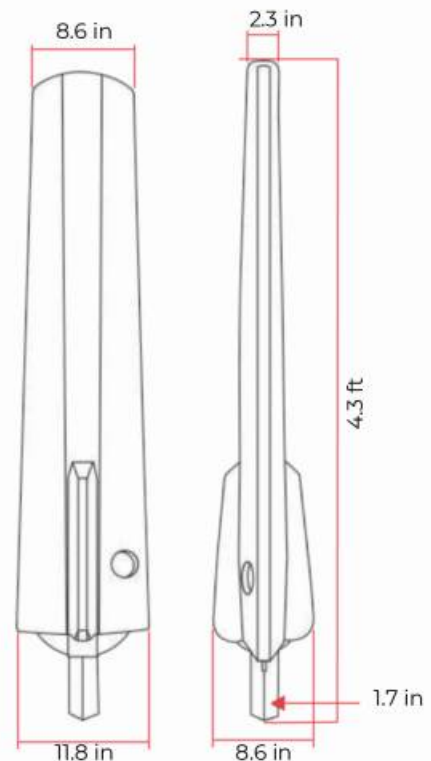

ROAD ANTI GLARE SCREEN

Code: PA-132

TECHNICAL SPECIFICATIONS

Specification	Unity	Test Method	Typical Value
Melt Flow Index	gr/10 min	ASTM-D-1238	0.35
Density	gr/cm3	ASTM-D-1505	0.956
Tensile Stress at Yield Point	Mpa (psi)	ASTM-D-638	26.5 (3840)
Ultimate Tensile Strength	kgf/cm2	ASTM-D-638	34.3 (4978)
Elongation at break	%	ASTM-D638	>500
Stiffness (OLSEN)	Mpa (psi)	ASTM-D-747	980 (142232)
IZOD Impact (groove)	Nm/m (lbtft/in)	ASTM-D-256	98 (1.84)
SHORE Hardness	D Type	ASTM-D-2240	64
Environmental Stress Crack Resistance (ESCR)	Hr	ASTM-D-1693	300
Melting Point	°C	ASTM-E-794	132
VICAT Softening Point	°C	ASTM-D-1525	125
Sieve Analysis	-	ASTM-D-1921	A
Pollution	-	QC-2B-1101-A	A
Color	-	ASTM-E-308	A
Primary Antioxidant	-	ASTM-D-5524	CONTAIN
Antacid / Lubricant	-	ASTM-E-1024 ASTM-D-4927	CONTAIN
Weight	4.960 lbs	-	-