


TPES-P-80 PARKING STOP

Code: TPES-P-80

FEATURES

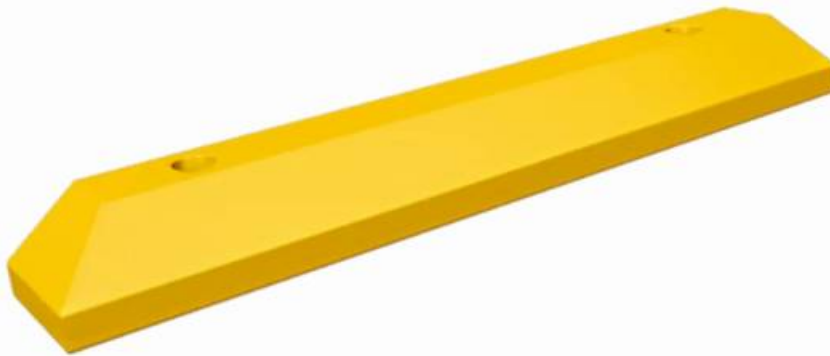

- Parking stop mainly used in indoors, or places with small or reduced space.
- Easy to handle and store.
- Resistant to UV-rays, humidity, oil, and extreme temperature changes.
- Maintenance Free.
- Contributes to a safer environment.
- Great durability.
- Ideal for any surface type.
- Integrated reflective material in yellow, white or blue color.
- Easy to install through steel anchors (not included).


MEASUREMENTS

Volumes, dimensions and other measures are nominal and may vary by approximately 2%.

- Total**
- Length: 32.0 in
 - Width: 6.2 in
 - Height: 3.3 in

- Approx. Weight**
- 8.487 lbs.

- Manufactured in**
- High density polyethylene



TPES-P-80 PARKING STOP

Code: TPES-P-80

TECHNICAL SPECIFICATIONS

Tensile Strength at Yield Point (ASTM D 638)	• 17.3 mpa
Tensile Strength at Breaking Point (ASTM D638)	• 27.2 mpa
Yield Point Elongation (ASTM D 638)	• 17.4 %
Elongation at Break (ASTM D 638)	• 1 500 %
Flexural Modulus (ASTM D 638)	• 610 mpa

Impact Strength Izod (ASTM D 256)	• 530 j/m
Tensile Impact Strength (ASTM D 1822)	• 163 kj/m ²
Impact 40°C (104 °F), 3.2 mm	• 23 900 j/m
Softening Point (vicat) (ASTM D 1525)	• 113°C or 235°F
Heat Deflection Temperature (ASTM D 648)	• 80°C or 176°F