


PADDLE LUMINAIRE

Code: L-RQ-2

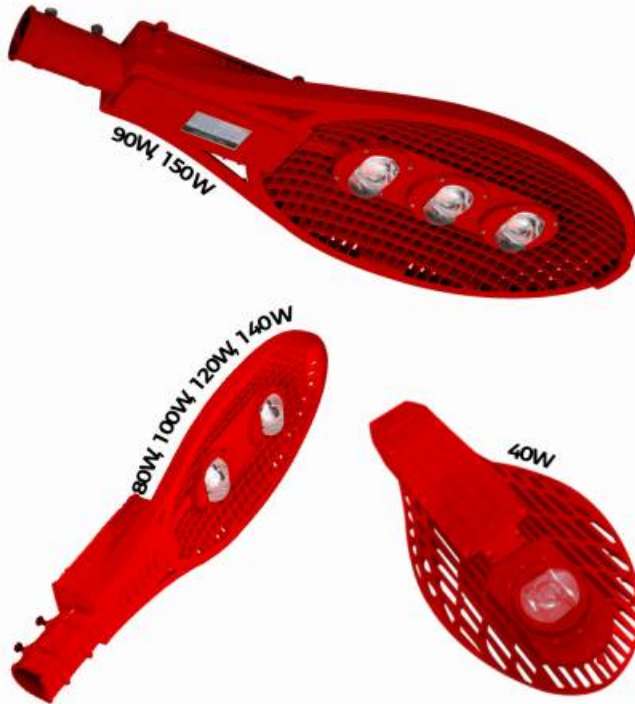

- 3D design of ventilation grilles in polyhedron shape, creates an effect of crossed ventilation, dissipating the heat efficiently, avoiding overheating.
- The alloy of copper, magnesium and aluminum allows a quick heat dissipation.
- Optical lens of high refraction with excellent light transmission rate.
- Elegant and unique design of a kind.
- Lamp body is available in red, yellow or green.
- It offers a powerful lighting thanks to 1, 2 or 3 integrated LEDs.
- It provides a stable and reliable energy.
- Ecofriendly.
- Reduced energy consumption, from a 50% to a 70% less than conventional lamps.
- Ideal for streets, avenues, parks, residential zones, factories or any outdoor area that needs lighting.

Dimensions:

- LED 1: 25.5 in of length x 11.8 in of width.
- LED 2 & 3: 37.4 in of length x 13.3 in of width.

# of LEDs	1		2			3	
Model	L-RQ-40W	L-RQ-80W	L-RQ-100W	L-RQ-120W	L-RQ-140W	L-RQ-90W	L-RQ-150W
Power	1x40W	2x40W	2x50W	2x60W	2x70W	3x30W	3x50W
Luminosity	3200 lm	6400 lm	8000 lm	9600 lm	11200 lm	7200 lm	12000 lm

Lighting Range	Mounting Height: 6 m > 79 Lux Mounting Height: 8 m > 44 Lux Mounting Height: 10 m > 29 Lux Mounting Height: 12 m > 20 Lux
Input Voltage	AC85V-AC265V, AC277V + (50 Hz - 60 Hz)
Environmental Protection	Ip65 (outer) with limits of -40°C to 55°C with humidity of 10 to 90%
General Mechanical	Aluminum casting for pipes of 62 mm Ø

