



GLOBAL FORTE SIGN 61

Code: SE-BA-6161



Comply with NOM-034-SCT2/SEDATU-2022

FEATURES

- Boards designed according to the 034-SCT2 regulation to guarantee visibility and compliance.
- Support with Posteflex® that guarantees resistance to adverse climate conditions, it includes grips of black polyethylene and screws for a safe fastening.
- Optimal size for signs to be recognizable at distance.
- In addition, it can turn to 45° and be a warning signal.
- Types of signs: Warning: it warns about possible risks. Restrictive: indicate prohibitions or limitations in transit. Work: inform about works in the road. Recreation: sign points of interest and services. Service: indicate available services in the zone. Safety: for emergency situations.
- IP68 waterproof electronic system.



- AND AND AND AND AND AND AND AND
- Manufactured in black polymer in one face, with support in Posteflex® in yellow or grey color.

TECHNICAL FEATURES

- Resistance to inclemency and temperature changes, with UV protection.
- Humidity-proof and recyclable; long life-span, due it doesn't rusts
- Vandal-proof, due is made of polymer it doesn't has resale value neither work for other uses, avoiding thefts.
- · Easy to stack, reducing transportation and storage costs.
- Easy installation; Posteflex® with tubular reinforcement on its interior or RHS of steel.

SOLAR SYSTEMS

- Solar power panel on top part.
- LEDs with optics with mirrors, causing a better light expansion in the sign.
- Batteries of 1.2 V.
- JVM power supply electronic circuit that synchronizes flashing of signs at the same time.
- It charges during 5 hours under sun, it lasts 12 hours ON in flashing mode.





GLOBAL FORTE SIGN 61

Code: SE-BA-6161

2.7 in

.⊆

25.1 i

MEASURES

Dimensions and other measures are nominal and may vary by + - 2 %.

General

Length: 25.1 in

Width: 2.7 in

Height: 25.1 in

Vinyl

Length: 24.0 in

Height: 24.0 in

Diamond

Length: 33.7 in

Height: 33.7 in

Reflective S.

· Depends on the design

Posteflex®

Width: 1.9 x 1.9 in


Length: 13.1 ft

Thickness: 0.19 in

Width: 1.9 x 1.9 in

· Length: 9.8 ft

Thickness: 0.11 in

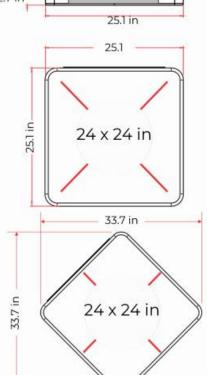





POSTEFLEX®

Height

In urban and rural roads, the lower part of sign stays at 8.2 ft above sidewalk level.

19.6 in Embed Leave 19.6 in to embed







GLOBAL FORTE SIGN 61

Code: SE-BA-6161

MODES



Restrictive: Prismatic reflective background in white color, texts and fillet in opaque black vinyl, ring in red color.

Warning: Prismatic reflective background in yellow color, texts and fillet in opaque black vinyl.

Recreation: Prismatic reflective background in blue or brown color (depends on the country), texts and fillet in opaque white vinyl.

Service: Prismatic reflective background in blue color, texts and fillet in opaque white vinyl.

Temporary Traffic Control: Reflective background in orange color, texts and fillet in opaque black vinyl.

Guaranteed adherence to vinyl.

Note: It can be customized with institution logo and printed digitally.